Date: 17th January, 2026

To

Managing Director

RGhha Bangladesh LTD

Bangladesh

Subject: Proposal for 4 MWp (DC) Rooftop Solar Project at RGhha2EgQ2FudA Bangladesh Ltd.

Dear Sir,

Thank you for the opportunity to submit the proposal for supply, installation, testing and commissioning of 4 MWp Grid connected rooftop solar project at RGhha2EgQ2FudA Bangladesh Ltd.

We carefully analyze your requirement and prepared our comprehensive commercial offer along with all necessary accessories as applicable. We are committed to delivering every project with superior efficiency, reliability, and enduring value through our expertise and high standards of service.

If you require any further information or clarification, please feel free to contact us at any time.

Best Regards,
RGhha2EgQ2FudA

Company Profile

General Experience RGhha2EgQ2FudA							
SL No	**Description of Work**	**Year**	**Completion Certificate Obtained**	**Work Awarding Authority**	**Work Completion Value**	**Share in %**	**RGhha2EgQ Completion Value**
1			Obtained			N/A	
			Total=				

Bill of Quantities

for

Supply, Installation, testing & commissioning of

Roof- top Solar on grid system for RGhha2EgQ2FudA

Commercial Proposal for 4 MWp Solar Project at RGhha2EgQ2FudA Bangladesh Ltd

SL	Equipment	Item Description	Import/Local	Unit	QTY	Total Price (BDT)
1	Solar PV Module	Brand: Type: Monocrystalline Module Model: Capacity: 620 Wp Dimensions: 2382×1134×30 mm Degradation: 1st year 1% then 0.4%/ year Efficiency: 23.1% Origin: China Workmanship Warranty: 12 Years Power Output Warranty: 25 Years HS Code:	Import	Wp		
2	On-grid Inverter	Inverter Capacity -110KW, Efficiency-98.6%, Maximum Input Voltage-1100V, Number of MPPT-12, Maximum Output Current- 158.8A (3W+N+PE), IP-66, Adjustable Power Factor- 0.8 leading to 0.8 lagging, Dimension-682*1117*363mm, Weight-93.5 KG. HS Code:	Import	Nos		
3	DC Cable	1C*4 rm XLR-E Brand Maximum Voltage ratting-1.5 kV, Maximum Current Ratting- 55A HS Code:	Import	Meter		
4	Solar Racking System Module Mounting Structures	Mounting Structure Supporting Accessories- Shed Type: Flash Mount Technology (Rivet, Nut- Bolt, Washer, EPDM) Origin: China Warranty: 10 Years HS Code:	Import	Lot		
5	Data Manager (Monitoring & Communication System)	Brand Warranty: 2 years	Import	Lot		

6	Hybrid fuel controller	Hybrid Controller/Fuel Save Controller Warranty: 03 Years HS Code:	Import	Lot		
7	String Connector	MC4 type a) TUV certified b) Rated Voltage 1500V DC c) Rated Current 30A d) IP 68 Protection e) Cable size 2.5mm to 6mm HS Code:	Import	Lot		
8	Weather Station	Brand: Model: WP-2S Class: Power Supply: AC 230V Communication Cable: RS485 Origin: China Warranty: 03 Years HS Code:	Import	Lot		
9	Energy Meter	Three Phase Energy Meter Bi-directional with CT PT Brand:		Nos		
10	AC Combiner Box	1. Distribution Box with powder coat 01 pcs 2. 250A Adjustable MCCB Circuit Breaker **04 pcs**		Lot		
11	AC Cable for Inverter to MDB to SDB	AC cables (Inverter to ACDB & MDB) **4 x 1C 70 sq mm NYY** (Note- Inject Point Consider in Top Floor at BBT or MDB) Origin: Brand:		Meter		
12	Earthing Cable 1	Earthing Cable **1 x 1C 35 sq mm BYA (As** Required) Brand: Origin:		Meter		
13	Earthing Cable 02	**Cable Size BYAF 1C*4 rm,** Voltage Ratting- 0.45KV, Current Ratting in Air at 35 degree--38A Brand: BRB/BBS Origin: Bangladesh		Meter		

14	Cable trays	Ladder type **(width 4 inches, Height 2 inch)** with Cover, Aluminum **1.1 mm thickness**		RM		
	Cable trays	Ladder type **(width 12 inches, Height 2 inch)** with Cover, Aluminum **1.1 mm thickness**		RM		
15	Walkway	Maintenance Walk Way (Aluminum Checker plate) Type: Aluminum Width: 400mm Warranty: 05 Years		RM		
16	Earthing	Earthing the electrical installation with 40 mm (1.5") Dia. G.I. pipe (earth electrode) having 6.35 mm. Dia. hole across the pipe at 305 mm. interval No-2 SWG HDBC earth leads (at the top of the electrode) with its protection by 20 mm. (3/4") Dia. G.I. pipe up-to plinth level run at a depth of 609.6 mm (2 ft..) below G.L up-to main board to be earthed including necessary connecting copper sockets, bolts, nuts, etc. complete for maintaining earth resistance less than 1 ohm. Depth of bottom of main electrode at 37338 mm. (122.5 ft.) from GL & length of electrode 36576 mm. (120 ft.). Construction of earthing inspection pit inside measurement 600 mm x 600 mm with 250 mm thick brick in cement mortar (1:4) with 100mm thick RCC top slab (1:2:4) with 1% re-enforcement 450 mm Dia. water sealed CI man-hole cover with locking arrangement including necessary earth works, site filling and one brick flat soling 75 mm thick (1:3:6) base concrete for making inlet channel & 12mm thick (1:2) cement plaster with neat finishing etc. all complete up to a depth of .75 meter		Nos		
17	Cleaning system	1. Pipe laying 1.25" &1" PVC thread pipe 2. Pipe Fittings, 3. Nozzle/ball valve uPVC, 4. Union, 5. Water Pump 2 Hp (RFL)- 2 no's 6. Cleaning Brush - 02 no's		Job		

18	Safety Railing **(Should physically visit and replicate the existing design)**	1. MS Angel 38*38*2.5mm 2. MS Hollo box 38*38*1.2mm 3. Flat bar 35*35*2.5mm 4. MS Sheet 12*90*12mm 5. SS304 Supporting Channel for Parling 12*25*12* 1.5mm(L-250mm) 6. Enamel Paint		RM		
19	Life Line System	1. C Channel12*40*12*2mm with 3mm Z Channel 2. C Channel12*100*12*2mm 3. SS wire 8 mm (Grade 304)		RM		
20	Forklift, Security **(will be billed if used)**	Crane & Forklift, Security		Job		
21	Network Accessories	CAT-6 - 1 Coil 8 Port LAN Switch, 100Mbps, 1 Pcs		Job		
22	Design drawing, site preparation, Installation, Testing, Commissioning	Design drawing, site preparation, Installation, Testing, Commissioning. 1. Final Design before work 2. Grant Chart 3. IR Test for AC & Dc Network 4. Thermal Test full System 5. As Build Drawing 6. SLD 7. PV Syst Report (Ideal standard)		Job		
23	Efficiency testing	Efficiency testing of 5% panel and inverter from BUET		Job		
24	Net metering	1. Net metering approval from govt. 2. Required accessories for net metering with installation.		Job		
25	Sky light protection AS per design provided	Sky light protection- Gril 930*2675mm MS Round Rod 4 mm and 3/4" MS Angle (Grating Type -75*300mm		Job		
26	Profile Sheet	Profile sheet 900*2500mm with installation (Thickness 0.5mm)		Nos		

Summary:

Grand Total	208934783 BDT
Total with AIT (Without VAT)	240275000 BDT
Grand Total with VAT &AIT	264302500 BDT
Cost/Wp	66.07 BDT/Wp

Parameters	Capacity	Unit
DC Capacity	269	kWp
AC Capacity	215.2	kW
CAPEX [Can change according to wp rate]	16025000	BDT
Per kW Cost	59.79477612	BDT
Equity [100%]	16025000	BDT
Loan [0%]	0	%
Interest Rate [6%]	6	%
Total Area Required	16200	square feet
1st Year Electricity Generation	333449	kWh
Revenue as per 1st year Electricity Generation	3334490.001	BDT
O&M Cost	403500	Per Year
Tariff	10	BDT
Per kWh Cost Solar	2.555563478	BDT
Per kWh Saving	7.444436522	BDT
ROE	5.619595823	Year
ROI	5.619595823	Year
Total Profit	54636327	BDT

Fig 1: Important Metrics at a glance

	EUseful	PR	PR loss
Year	MWh	%	%
1	333.45	80.61	-0.24
2	331.86	80.23	-0.71
3	330.27	79.84	-1.19
4	328.68	79.46	-1.66
5	327.10	79.08	-2.14
6	325.51	78.69	-2.61
7	323.36	78.17	-3.26
8	321.21	77.65	-3.90
9	319.05	77.13	-4.54
10	316.90	76.61	-5.19
11	314.75	76.09	-5.83
12	313.01	75.67	-6.35
13	311.28	75.25	-6.87
14	309.54	74.83	-7.39
15	307.81	74.41	-7.91
16	306.07	73.99	-8.43
17	304.77	73.68	-8.82
18	303.47	73.36	-9.21
19	302.17	73.05	-9.60
20	300.86	72.73	-9.99

Fig 2: 20 Year's Generation in PVsyst

Month	Monthly Generation
January	21705
February	24656
March	33798
April	33635
May	34420
June	28782
July	27879
August	30140
September	27326
October	26121
November	23849
December	21138
Total generation	**333449**

Fig 3: 1st Year's monthly Generation for 264kWp rooftop solar project simulation in PVsyst

System Production

Produced Energy	333448 kWh/year	Specific production	1209 kWh/kWp/year
		Perf. Ratio PR	80.61 %

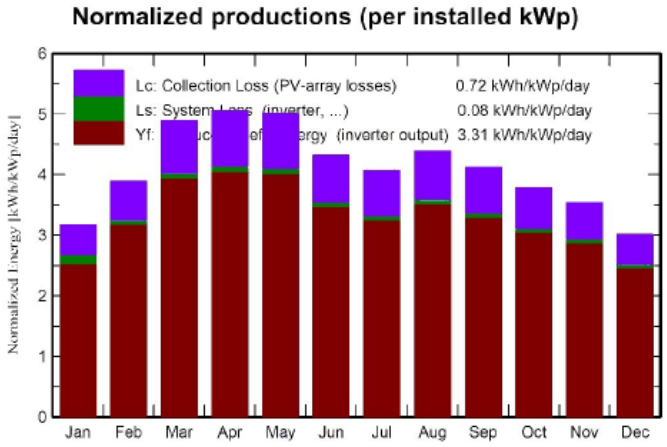

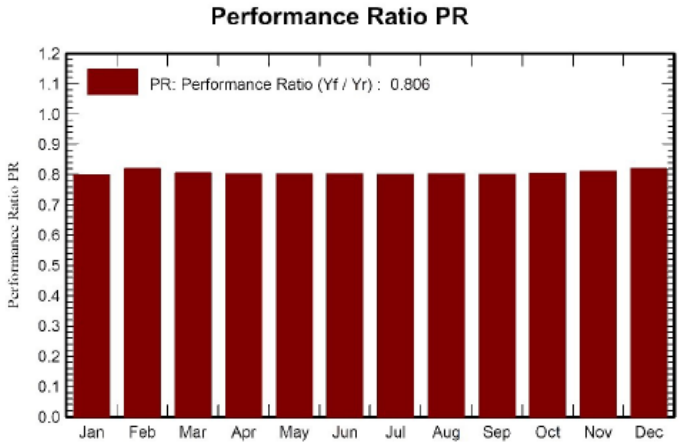

Fig 4: 1st Year's Normalized Generation and Performance Ratio in PVsyst

Environmental benefit

- Avoids **~5,000 tons of CO_2 emissions**
- Equivalent to:
  - Taking **1,100+ cars off the road for one year**
  - Planting **80,000+ trees**

Terms & Conditions:

- Completion: Within 210 days after receiving the work order with payment.
- Product Capacity: This financial offer applies to items with the mentioned quantity here. Price will vary if any amount changes.
- Manufacturer company of Panel and Inverter will be responsible for product warranty.
- Payment Terms: 50% advance with work order, 30% with products on site, 15% with 50% of project completion, and 5% after handover of the site.
- Payment Method: Through A/C pay cheque.
- Offer Validity: 15 Days from the date of submission of the offer.
- VAT & AIT: Including VAT and AIT.
- NB: This is not the final price. The quoted price is subject to change if additional products or scope variations are required by the Authority/Engineer-in-Charge.